
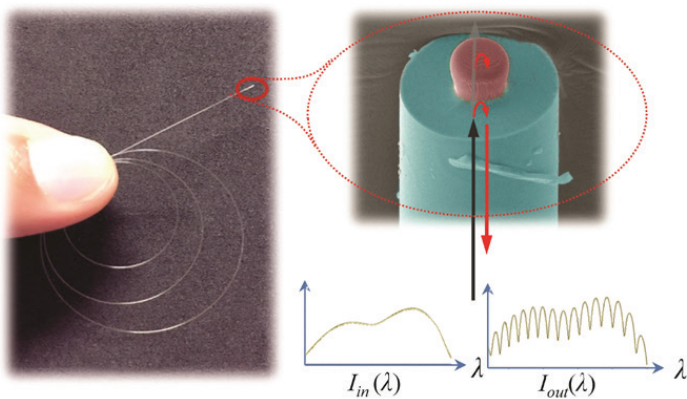


2SWLFD0)LEHU7RSOLFURFDLW&2
Department of Electrical Engineering

6HVRU

A new type of fiber-optic CO₂ sensor based on a polymer Fabry-Pérot (FP) cavity fabricated on the end face of a standard single-mode optical fiber has been developed. A photo-crosslinkable poly (ionic liquid) (PIL) with strong CO₂ adsorption ability was synthesized and then printed on the top of optical fiber by using an home-built in-situ optical printing technology to form an FP cavity for CO₂ sensing. Experimental results show such a miniature fiber-optic sensor has wide detection range and relatively fast response time for CO₂ detection.

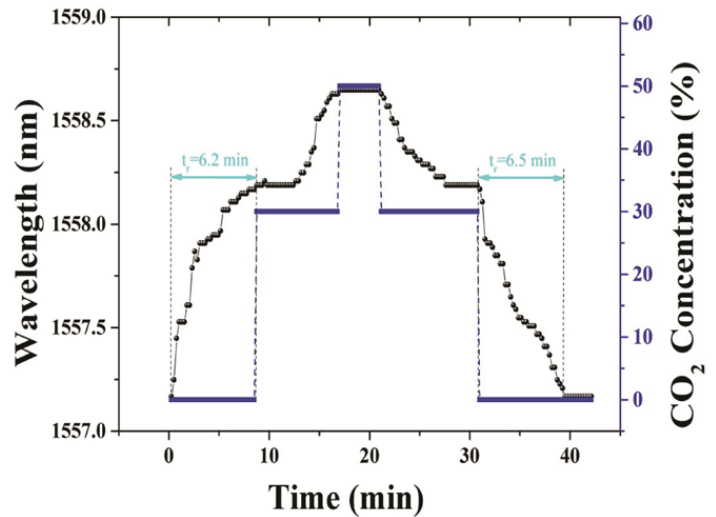

The result of a cycling test for characterization of the dynamic response of the fiber-optic CO₂ microsensors shows that the response time of the CO₂ microsensors is around 6.5 minutes, which is much faster than that previously reported PIL CO₂ sensor (which is about 30 minutes). The fast response time of the CO₂ microsensors is attributed to its small size achieved by optical microfabrication process.

Representative Publication

Optical Fiber-Top Microcavity Sensor for CO₂ Detection

Jushuai Wu¹, Ming-jie Yin¹, Karoline Taeuber², Alessandro Dani², Ryan Guterman², Jiayin Yuan², A. Ping Zhang¹ and Haw-yaw Tam¹

¹Photonics Research Center, Department of Electrical Engineering, The Hong Kong Polytechnic University, Kowloon, Hong Kong SAR, China

²Department of Colloid Chemistry, Max Planck Institute of Colloids and Interfaces, D-14424 Potsdam, Germany